

iFOTO Tripod Kits

The iFOTO has been updated based on the Travel Angel tripod kits. The spider has been changed to 3 angle adjustment to reinforce the performance of low angle shooting.

It also has the super performance of magnesium, monopod function, slot at the end of center column for reverse shooting, meanwhile, magnesium has better vibration absorption performance, while is the professional choice for professional photographers and landscape photographers.

Model NO



Sections



Max. D

(mm)



Min.D

(mm)



Max.H

(mm)



Normal.H

(mm)



Min.H

(mm)



Folded

(mm)



Weight

(kg)



Max.Load

(kg)



Max.H

(mm)

IF28+

4

Φ28.6

Φ18.4

1650

1385

465

465

2.19

14

1725

IF18+

4

Φ25.2

Φ15

1600

1340

450

450

1.82

10

1675



IF18+

(Alumnum Tube) iFOTO Tripod Kit

Compatible Camera and Lens List

Nikon

D700 D1 D2
D2x D800/E
D4 D2H D3
D3x D3s

Canon

EOS 5D
EOS 5Dmark2
EOS 7D
EOS 1D
EOS 1Dmark2
EOS 1Dmark2N
EOS 1Dmark3
EOS 1Dmark4
EOS 1Ds
EOS 1Dsmark2
EOS 1Dmark3
EOS 1DX


Sony

A900 A850

24-70mm Camera with lens
24-105mm Camera with lens
24-200mm F2.8 Camera with lens
300mm F4 Camera with lens
200mm F2.8 Camera with lens



Ball Head

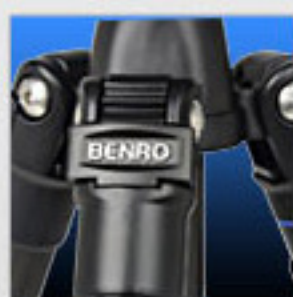

Magnesium Spider



Leg Detaching
System



Three Angle
Adjustment System



Hook on
Center Column



Leg Anti-Sliding
System

IFoto




1. PU Quick Release Plate



2. 3D Bubble Level



3. Quick Release Lock System

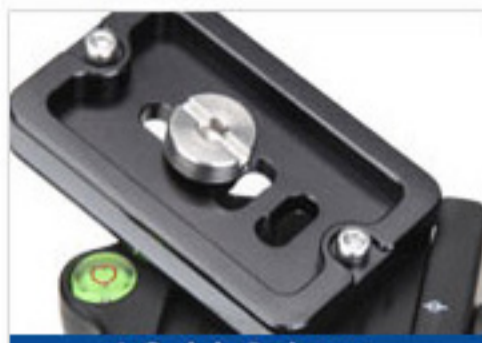

4. Quick Release Clamp Anti-Sliding Nail



5. 5.36mm Ball



6. 3/8" Head Screw



Model NO

Ball D	Max.H	Base D	Weight	Max.Load
(mm)	(mm)	(mm)	(kg)	(kg)
IF18+ 36	94	52	0.36	10

3D bubble level keeps the image in level position

Decrease the camera surface scratching and increase the friction.

Use hexagon wrench to make the QR plate install on camera more tightly to prevent the QR plate dropping down incidentally. The design of two-sided anti-sliding nails effectively protects your gears from destructive damages in case of miss-performance.



How to dismount QR plate



1 Pull out the locking knob



2 Rotate to loosen the lock knob counter-clockwise.



3 The effect after rotate counter-clockwise



4 Take out the quick release plate



1

Take out the quick release plate from the head.



2

Align the screw on the quick release plate to the mount of the camera.



3

Lock tightly by a hexagon wrench.

Pan Adjustment Knob and 360 Degree Scale

360° Degree Panoramic Shooting

The pan adjustment knob and 360 degree scale make the shooting and splicing more convenient. Wider image can be reached even if there is no wide angle lens.



1. Pan Adjustment Knob 2. 360 Degree Scale



Benro Technology



Auminium

Anti-impact, Anti-erosion, better stability.

Magnesium Spider

Magnesium

the choice for professional tripod


The same as high technology, Benro uses magnesium to bring high strength and rigidity for Benro tripods.



The Angle Adjustment System and 180 degree folding design.

Pull-out angle adjustment system

Simple and applied pull-out angle adjusting slice helps to adjust needed angle more easily. This tripod has three angles, high, middle and low. Adjust the angle according to actual demands.

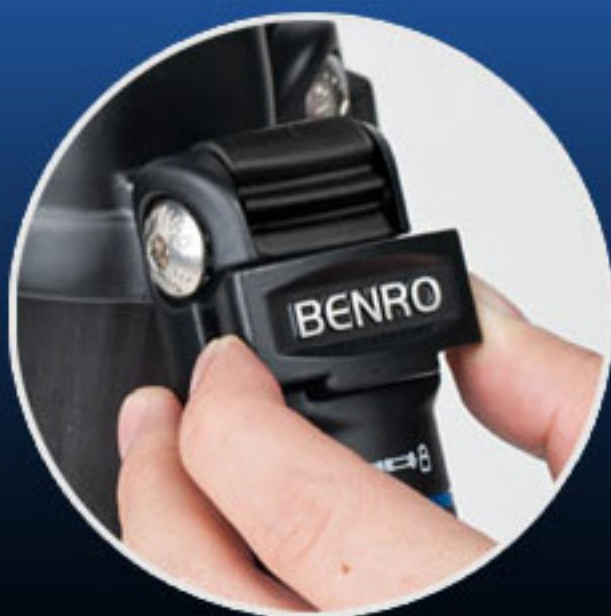

180° Degree Folding Design

It decreases the storage space and increases the portability and convenience.





Leg separation technology (the assembly of monopod and walking stick)

Leg Separation Technology

The leg with blue metal ring and foam grip can be rotated down individually and transformed to be new useful equipment.



The way to lengthen the monopod.



1. Screw out the hook on center column



2. Take out the center column with head



3. Screw out the leg



3. Connect the center column with the leg.



Reversing the center column



Super low angle shooting

If the shooting target is too low, the central column can be conversed and the camera can be installed reversely, which can get lower shooting position and angle.

Leg Quick Lock Stop System




New Leg Locking System

1. The new locking system is more stable with straighter tube, which increase the stability of the tripod
2. The new locking system helps loosening and locking quicker.
3. The locking force has been increased 10% accordingly.

New



Old

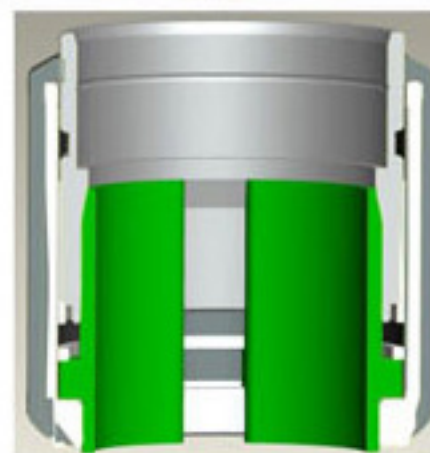

The touching area between the new lock ring and connecting sleeve is longer. The stability increases 10%.

Tube Dust Resistance Technology.

The new innovative leg locking system design offers a dust resistant shield to prevent inner lock exposing. When loosening or tightening the lock, the dust resistant shield moves up and down to effectively clean dust and sand on the surface of the tube. Compared with original products, the anti-dust function



Exchanging Spike Feet



Exchange Spike Feet

The rubber feet and spike feet can be exchanged according to different terrains.



The Heights of the Tripod.

1600mm


1340mm

450mm



How to choose a tripod suitable for your height.

The maximum height with center column extruding is the most important standard. The stability might be influenced with center column extended. The center column is suggested not extend with normal shooting, so choose the tripod according to your height with this standard. According to the common sense, the maximum height of tripod with center column extruding and not including head should be the height minus 35 to 40cm, so the maximum height of tripod 137cm with center column extruding is suitable for persons with height of 170cm to 175cm.

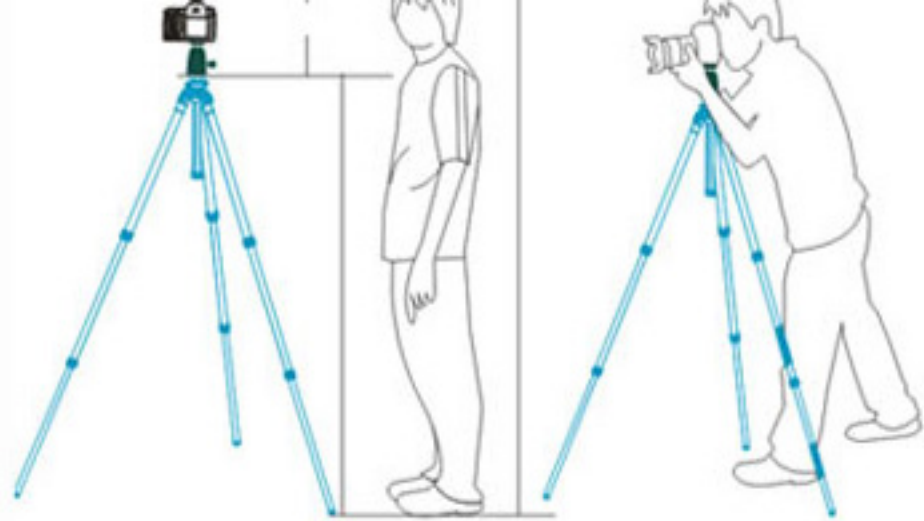

Items in Standard Packaging



IF18+

iFoto Aluminium Tripod Kit *Items in Standard Packaging*

- 1.A set of tripod 2.A piece of packing box 3.A tripod bag
4.3 pieces of spike feet and one piece hexagon wrench

Specifications

Model:	IF18+	Tube Size:	1#	Tube Size:	4 sections
Max. tube size:	25.2mm	Mln. tube size:	15mm	Mln. tube size:	1600mm
Normal Height:	1340mm	Mln. Height:	450mm	Mln. Height:	450mm
Closed Height:	594mm	Weight of tripod:	1.82kg	Weight of tripod:	10kg

monopod + center column height: 1576mm
monopod + center column + head height: 1675mm